


SER2014 SERIES

Product description:

- Assemblage design, sturdy structure.
- High inductance, high current, low magnetic loss, low ERS, small parasitic capacitance.
- Flat wire winding, achieve a low DCR.
- Temperature rise current and saturation current is less influenced by environment.
- Operating temperature: -25 C ~125 C .
- Placement form is SMD.




Explanation of part numbers:




**Customers can order coated products for magnetic cores

Boundary dimension:

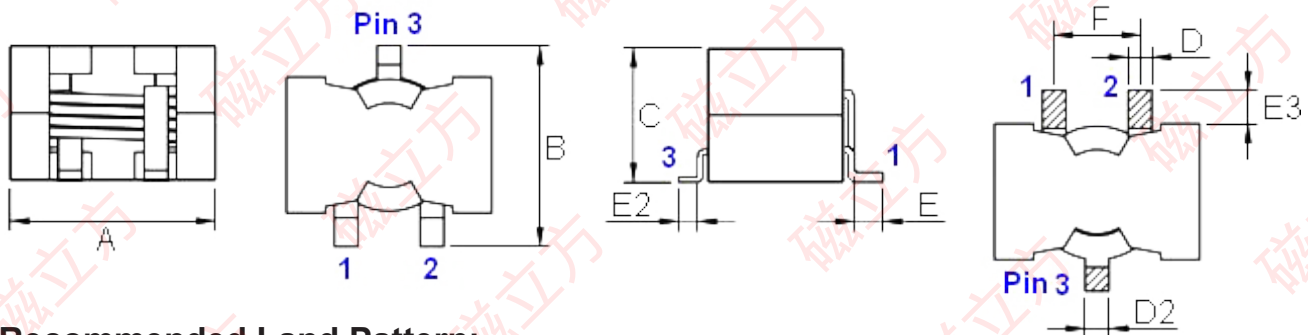

Recommended Land Pattern:

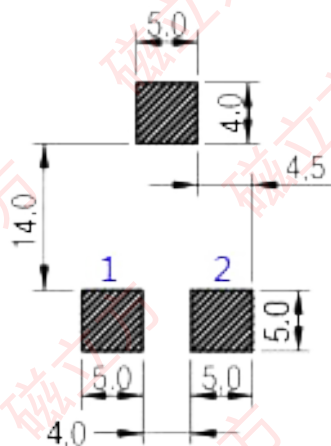

Size Series	A	B	C	D	D2
SER2014T	21.8 Max	21.5-22.5Max	14.5 Max	2.5±0.2	2.5 Ref.

Size Series	E	E2	E3	F
SER2014T	3.0±1.0	2.0 Ref.	3.5-7.0	9.0±0.5

(unit: mm)

Electrical characteristics:


Test condition: at 25°C 100KHz/0.1V

Part No.	Lo(0A) (μ H) \pm 20%	Irms(A) Type.	Isat(A) Type.	DCR(m Ω) Type.	DCR(m Ω) Max.	Material	Size B (mm)	DCR SPEC.
SER2014T-R70M	0.7	32	75	0.86	0.95	MnZn	22.5	Confirmed
SER2014T-1R4M	1.4	31.5	60	1.08	1.2	MnZn	22.5	Confirmed
SER2014T-2R2M	2.2	28	52	1.5	1.65	MnZn	22.5	Confirmed
SER2014T-3R1M	3.1	26	45	2.09	2.3	MnZn	22.5	Confirmed
SER2014T-3R3M	3.3	26	40	2.09	2.3	MnZn	22.5	Confirmed
SER2014T-4R2M	4.2	24	38	3.04	3.35	MnZn	22.5	Confirmed
SER2014T-4R7M	4.7	24	32	3.04	3.35	MnZn	22.5	Confirmed
SER2014T-5R5M	5.5	22	33	4	4.4	MnZn	22.5	Confirmed
SER2014T-6R8M	6.8	21	30	5.65	6.2	MnZn	21.5	Confirmed
SER2014T-7R0M	7	21	30	5.65	6.2	MnZn	21.5	Confirmed
SER2014T-8R6M	8.6	17	25	7.2	7.95	MnZn	21.5	Confirmed
SER2014T-100M	10	16	23	7.95	8.75	MnZn	21.5	Confirmed
SER2014T-150M	15	14	21	8.7	9.6	MnZn	21.5	Confirmed
SER2014T-220M	22	12.5	15	10.65	11.75	MnZn	21.5	Confirmed
SER2014T-330M	33	12	11	11.4	12.6	MnZn	21.5	Confirmed
SER2014T-470M	47	11	8.5	12.2	13.5	MnZn	21.5	Confirmed

NOTE:


- All test data is referenced to 25°C ambient.
- I_{rms}: DC current(A) that will cause an approximate Δ T of 40°C.
- I_{sat}: DC current(A) that will cause L_o to drop approximate 30%.
- Operating temperature range is -25°C to 125°C.
- The part temperature(ambient and temp rise) should not exceed 125°C under worse case operating conditions. Circuit design, component placement, PWB trace size and thickness, airflow and other cooling provision all affect the part temperature. Part temperature should be verified in the end application.
- *P/N* is customer customized specifications.
- Rights of changing product's design and specification are reserved, without prior notice.

Packing Information:

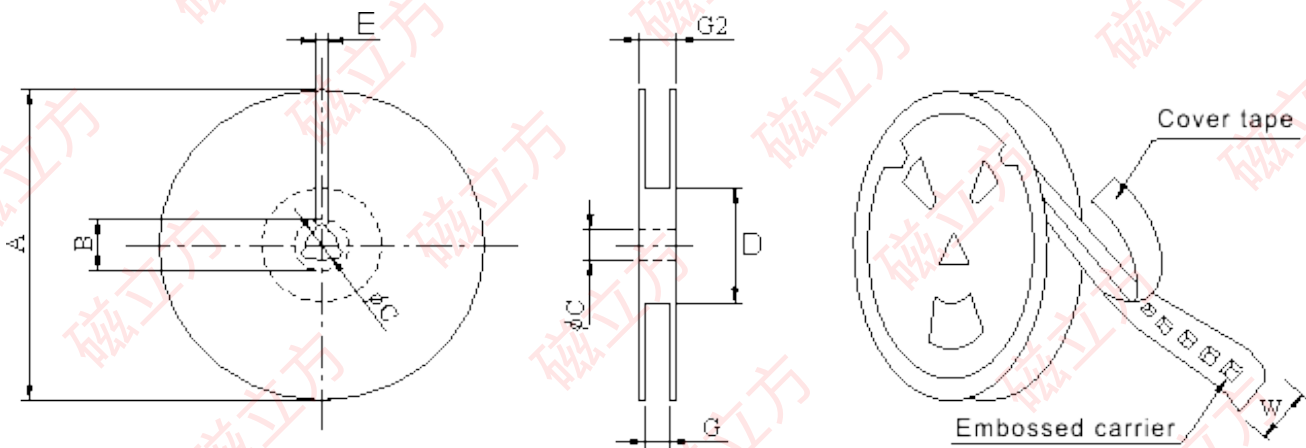

(unit: mm)

TYPE	A(Ref.)	B(Ref.)	C(Ref.)	D(Ref.)	E(Ref.)	G(Ref.)	G2(Ref.)
330*44mm	330±1	20±0.8	13±0.5	100±1	2.0±0.5	44.5±0.5	49±0.5

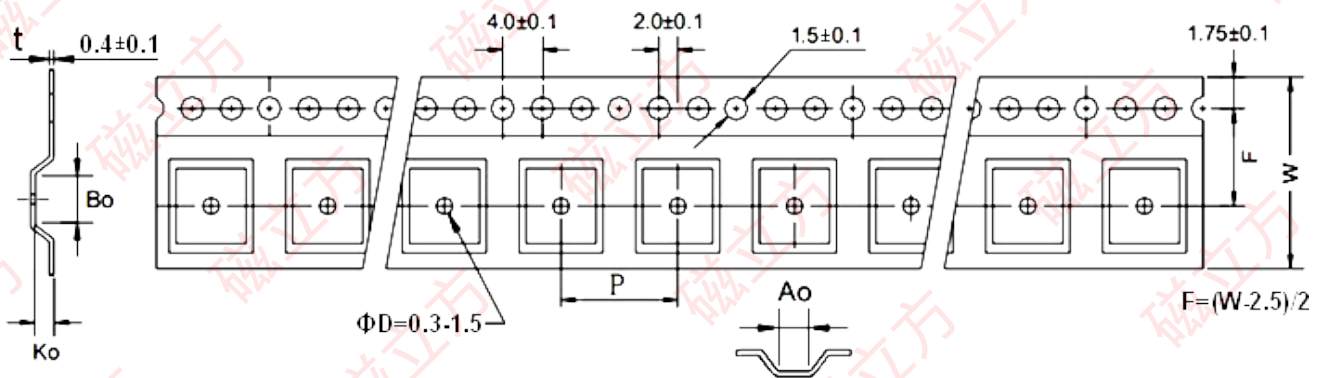

(unit: mm)

Series	QTY (Pcs/Reel)	Ao	Bo	Ko	W	P
SER2014	120 Ref.	24.5	21.5	17.5	44	32

Typical Pulling Force: 10~130grams

